

VERTIGO CLOUD LIGHTING 120x120

Product Code: SS280

Specification

- Composition: 100 % polyester (recycled PET appx. 50 %)
- Material Weight: 1300g /m<sup>2</sup> (+/- 5 %)
- Material Thickness: 6mm Natural & Mandarin colors (+/- 10 %)
- Panel Weight:   Natural: 5,63 kg / per pcs. (+/-5%)  
                          Mandarin: 6,13 kg / per pcs. (+/-5%)

Performance

- Acoustic Rates: 3,46 Sabin (m<sup>2</sup>) 250-4000Hz
- Fire Rates: B, S1, d0 (EN-13501)
- Light fastness: 6+ (ISO-105 B02)
- MAS Certified Green - CDPH Standard Method v1.2  
  Low VOC / Eligible for LEED v4
- Health : 99.9 % Antibacterial (ISO-20743)  
  Formaldehyde-free (ISO-14184)
- Moisture Absorption: >0.03 % by weight  
  (50°C/122°F at 90% relative humidity)
- Thermal insulating: 0,040 W/mK

Key Features & Benefits


- Available in 7 Natural colours & 33 Mandarin colours.
- Highly durable providing long-term stability and performance.
- Safe, non-toxic, non-irritant & without red list chemical binders.
- Recycled and recyclable.

Care

- Easy to clean with a damp cloth or vacuum cleaner.
- Indoor use only.

Installation

- Designed for easy assembly with adjustable ceiling mount units.

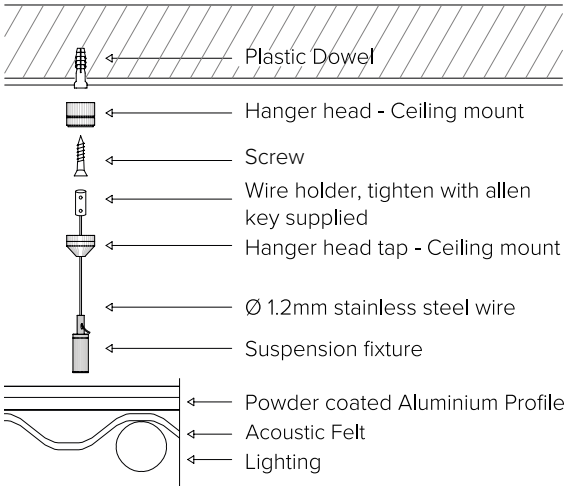

Dimensions(mm):



- L: 2400mm

W: 1200mm

Thickness: 6mm
- Lamb Dimension

L: 1000mm

Ø: 30mm

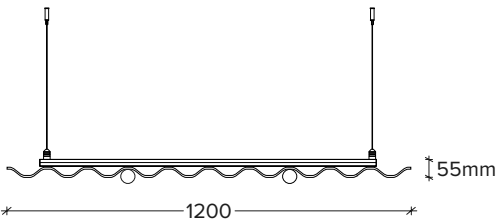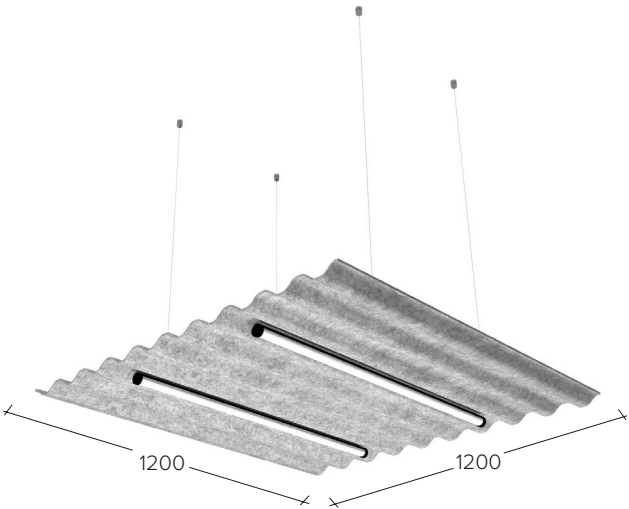

Light Source Specifications	
Wattage	44W
Input Voltage	220 - 240V AC
Input Frequency	50 / 60 Hz
Lumen Output	4180 lm
Color Temperature	2700K, 3000K, 4000K options
Color Rendering Index	Standard 80CRI or optional 90CRI
Unified Glare Rating	-
Control Type	Standard On/Off
Dimmable* (Optional)	DALI, Push Dim, Bluetooth options
Lighting Type	Direct Lighting

