

BOWL
WALL MOUNTED

Product Code: SP120

Specification

- Composition: 100 % polyester (recycled PET appx. 50 %)
- Material Weight: 1300g /m² (+/- 5 %)
- Material Thickness: 6mm Natural & Mandarin colors (+/- 10 %)
- Product Weight: Natural: 2,43 kg per pcs. (+/- %5)
Mandarin: kg per pcs. (+/- %5)

Performance

- Acoustic Rates: Sabin (m²) 250-4000Hz
- Fire Rates: B, S1, d0 (EN-13501)
- Light fastness: 6+ (ISO-105 B02)
- MAS Certified Green - CDPH Standard Method v1.2
Low VOC / Eligible for LEED v4
- Health : 99.9 % Antibacterial (ISO-20743)
Formaldehyde-free (ISO-14184)
- Moisture Absorption: >0.03 % by weight
(50°C/122°F at 90% relative humidity)
- Thermal insulating: 0,040 W/mK

Key Features & Benefits

- Available in 7 Natural colours & 33 Mandarin colours.
- Highly durable providing long-term stability and performance.
- Safe, non-toxic, non-irritant & without red list chemical binders.
- Recycled and recyclable.

Care

- Easy to clean with a damp cloth or vacuum cleaner.
- Indoor use only.


Installation

- Designed for easy assembly with adjustable ceiling mount units.

Dimensions (mm):

Ø: 600mm
h: 180mm

Lighting Fixture:
Ø: 300mm

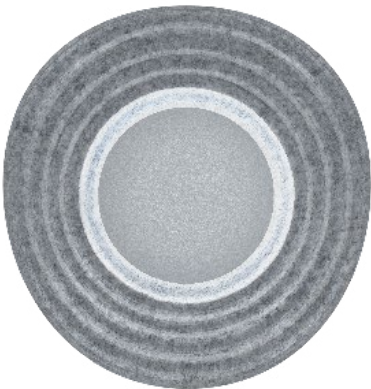

Direct Lighting
Option



Direct + Indirect
Lighting Option



Light Source Specification	
Wattage	25W
Input Voltage	220 - 240V AC
Input Frequency	50 / 60 Hz
Lumen output	2500 lm
*** Color Temperature	2700K, 3000K, 4000K options
Color Rendering Index	standard 80CRI or optional 90CRI
Unified Glare Rating	UGR<19
Dimmable	DALI, Push Dim, Bluetooth, Phase Cut options
Lighting Type	Direct Lighting

*** Bowl surface mounted lightings and Bowl wall lamps are available with Mandarin colors at outer surface.
*** Lighting source standard diffuser is Micro Prismatic. Opal PC diffuser option is also available.
*** Color temperatures of lighting sources can be customised.

